Meaningful Innovation.

INSTRUCTION MANUAL

LED CEILING SKY GLOW LIGHT



02 YEAR WARRANTY*

IP44 RATING

CRI >80

TECHNICAL DATA

MODEL	VT-84028	VT-84034
SKU	24541	24542
WATTS	24W	36W
LUMENS	2640 Lm	3960 Lm
BEAM ANGLE	110°	110°
CCT RANGE	RGB+3000K-6500K	RGB+3000K-6500K
INPUT VOLTAGE	AC:220-240V, 50/60Hz	AC:220-240V, 50/60Hz
TOTAL CURRENT	150mA	250mA
LIFE SPAN	20,000 Hours	20,000 Hours
ON/OFF CYCLE	>15,000 Times	>15,000 Times
BODY TYPE	Plastic	Plastic
DIMENSION	Ø350x50mm	Ø447x61mm

- *This product contains a light source of energy efficiency class<E>, where <E> shall be replaced by the energy efficiency class of the contained light source.
- Operating ambient temperature: -20°C to +45°C

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

FR

Cet appareil, ses accessoires et cordons se recyclent


À DÉPOSER EN MAGASIN

OU

À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B



Caution, risk of electric shock.



This marking indicates that this product should not be disposed of with other household wastes.

INTRODUCTION & WARRANTY


Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other queries, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to assist you. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 hours of daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a certified person.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. Method of attachment of the cable or cord such that any replacement can only be made by the manufacturer, his service agent or similar qualifed person.
6. For indoor use only.

ATTENTION

Do not look directly into the LED light source. Product can only be supplied by rated voltage or voltage within the range provided. Do not use the product with damaged protective cover. Product must not be used in unfavorable conditions, e.g. dust, water, moisture, vibrations, explosive air atmosphere, fumes, or chemical fumes, etc. In the area of strong electromagnetic interference, the functioning of the product may be disrupted.

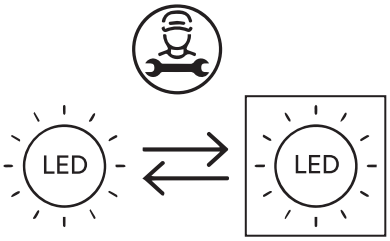

Replaceable (LED Only)
light source by a professional


USAGE GUIDELINES/MAINTENANCE

Any maintenance work must be performed when the power supply is cut off and the product has cooled down. Clean only with soft and dry cloths. Do not use chemical detergents. Do not cover the product. Ensure free air access. Product may heat up to a higher temperature.


MOUNTING

Read the manual before mounting. Mounting should be performed by a qualified electrician. Mounting diagram: see pictures. Check for proper mechanical fastening and connection to electrical power prior to first use.

WIRING DIAGRAM



INSTALLATION DIAGRAM

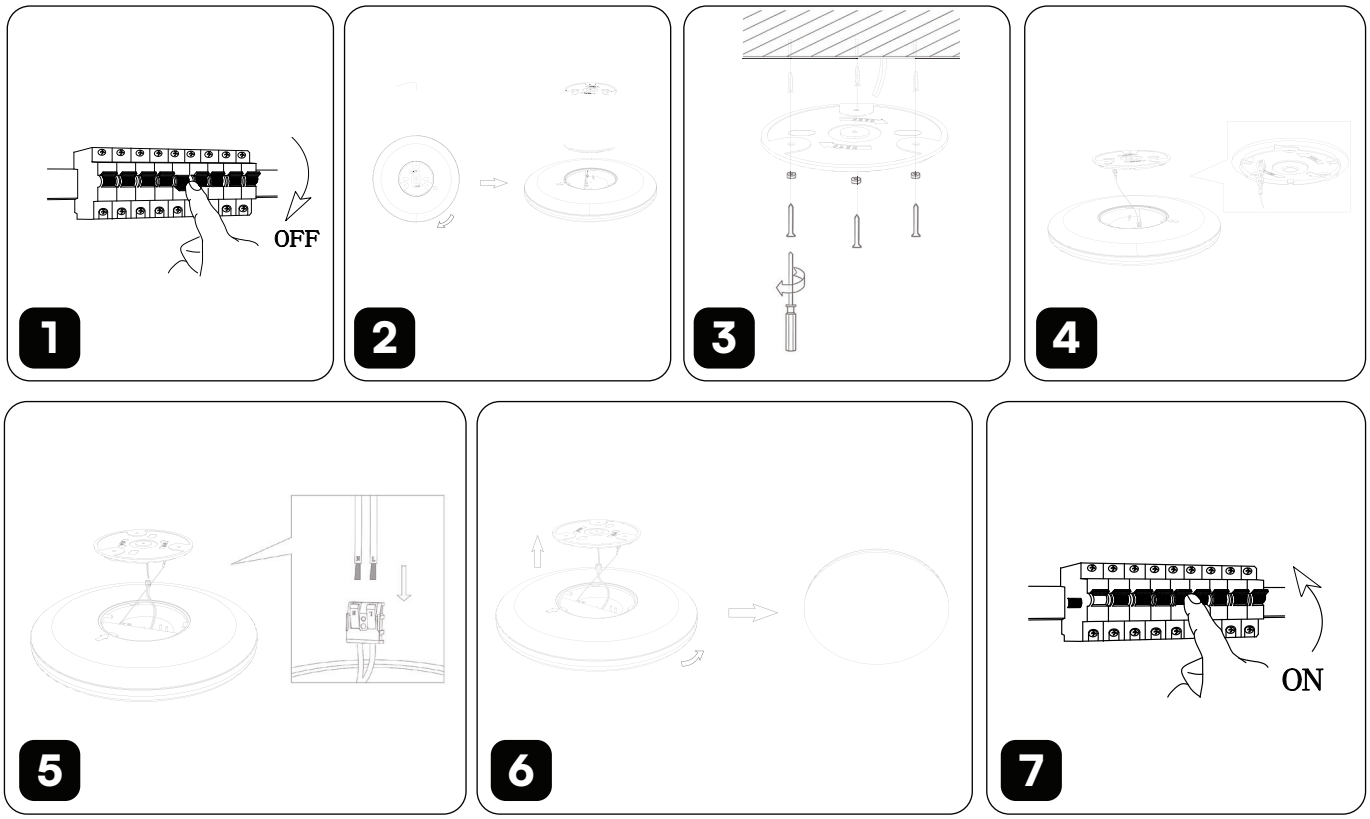


INSTALLATION INSTRUCTIONS

1. Turn off the power supply before beginning the installation.
2. Rotate the mounting plate counterclockwise to remove it from the light fixture.
3. Remove the expansion screws from the accessory kit and securely install the mounting plate onto the ceiling.
4. Attach and lock the safety buckle on the light fixture onto the mounting plate.
5. Connect the electrical wiring correctly according to the **L (Live) and N (Neutral)** markings.
6. Rotate the light fixture clockwise onto the mounting plate until it locks securely into position, then tighten the fixture and mounting plate with the supplied screws.
7. Before turning on the power, ensure that the light fixture is securely installed and that all wiring connections are correct and secure.

REMOTE CONTROL SAFETY INSTRUCTIONS

- Before using this product, make sure that all parts are configured correctly according to the instructions in the attached instruction.
- The product should not be used by persons under 5 years of age without supervision by a parent or guardian.
- Ensure that the power batteries are configured correctly and have the appropriate parameters as specified by the manufacturer.


REMOTE CONTROL INSTRUCTIONS

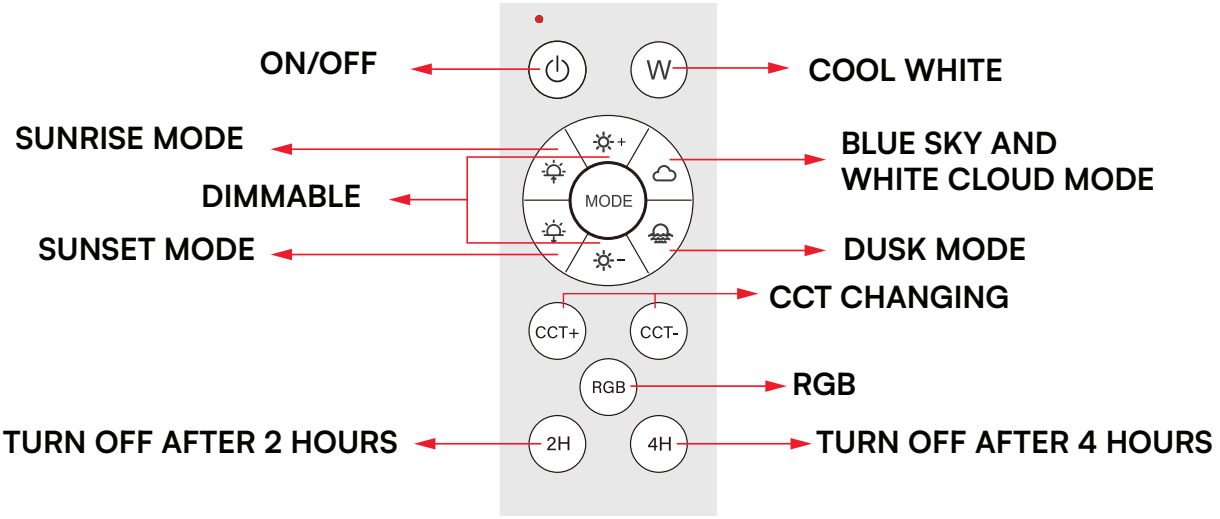


#The remote controller requires AAA batteries. [not included]

DISMANTLING INSTRUCTIONS


(For Market surveillance team only)

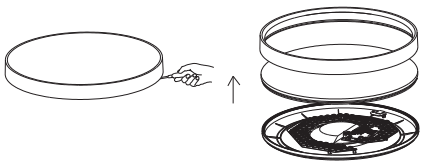


1. Use an appropriate tool to carefully pry open the frame and lampshade.



2. Unscrew the screw and remove the wire clamping clip.

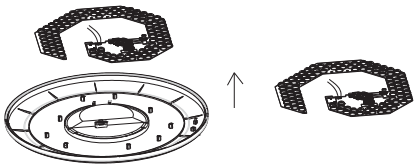

3. Remove the light source, including the driver.



4. Connect the light source to the power supply to perform a functional test.

Note

- Light source removal will void the warranty.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

RoHS

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX